
Linear Variable Filter

Bandpass & Edge Filters | VIS, NIR





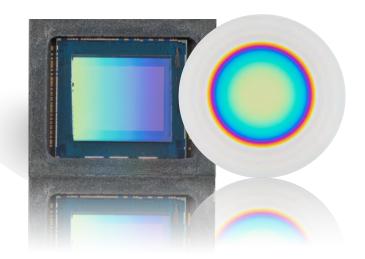


One speciality of Salvo Coatings is Linear Variable Filters (LVF's) and order sorting filters for spectroscopy and hyperspectral imaging. These state-of-the-art filters are scalable with volume and are a compact solution for many of today's optical challenges. By compressing the optical train, LVF's allow users to make spectroscopic devices with a monolithic element (Sensor plus Filter). Mount a linear variable band pass filter to an optical array, and you remove the need for the Czerny-Turner configuration but still maintain resolution consistent with the needs of most applications. Similarly, placing the same linear variable band pass filter onto a two dimensional focal plane array, and you can create a snapshot hyperspectral imager. Place it on a scanning system, and it's a push broom hyperspectral imager with full resolution.

Salvo is currently a market leader in UV/VIS, VIS/NIR, and SWIR LVF's. Meeting some of the most challenging requirements, nominal bandwidths of 1% (FWHM) of center wavelength, peak transmission of 70% and linearity of $\pm 0.5\%$. In addition extremely high gradients are achievable >200nm/mm. These filters can be deposited on a variety of substrates and optical glasses. In addition, Salvo Coatings sister company EOITech (https://eoitech.com/) is able to take commercially available sensors, remove the cover glass if needed, and mount the LVF filters directly to the sensors.

This combined service makes Salvo the go-to choice in LVF production and implementation.

Linear Variable Filter - Long Wave Pass (LWP)

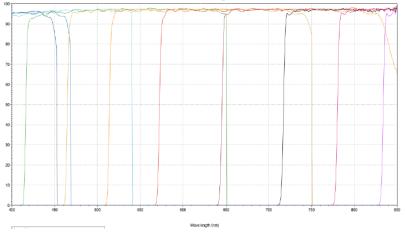



Spectral Bands

— Filter @ 1mm

— Filter @ 2mm

— Filter @ 6.76mm

— Filter @ 12.57mm

— Filter @ 18.38mm

— Filter @ 24.19mm


— Filter @ 30mm


— Filter @ 35.81mm

— Filter @ 41.62mm

— Filter @ 47.43mm

— Filter @ 53.24mm

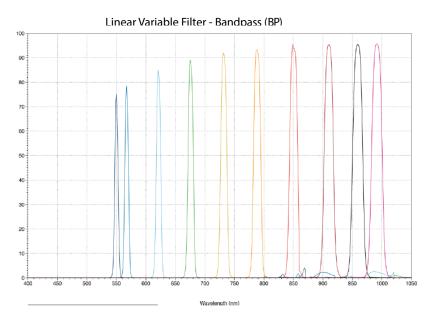

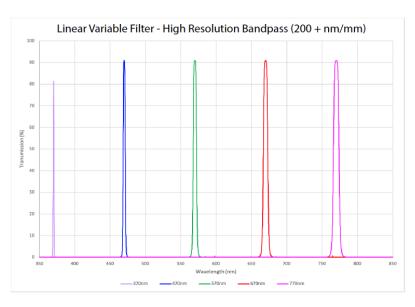

Spectral Bands

- Filter 10 @ 5mm
- Filter 10 @ 6.76mm
- Filter 10 @ 12.57mm
- Filter 10 @ 18.38mm
- Filter 10 @ 24.19mm
- Filter 10 @ 30mm
- Filter 10 @ 35.81mm
- Filter 10 @ 41.62mm
- Filter 10 @ 47.43mmFilter 10 @ 53.24mm

Benefits

- Continuously variable wavelength selection in one filter
- UV (230-500nm), VIS (400-700nm) and NIR (550-1000nm) versions
- Enable instrument design versatility & range
- Scalable to high volume OEM production

Applications

- VIS and NIR spectroscopy
- Biomedical instruments
- Fluorescence measurement
- Remote sensing
- Air & water quality
- Order sorting filters
- Monochromators
- Flexible prototyping

